



Company Profile



ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007



We build foundation!!



We build foundation!!



Bored Pile



- Circular bored piles for foundation of buildings, bridges, factories, roads, etc.
- Ø 0.5 – 2.0 m. x Depth up to 100 m.



Barrette Pile/Diaphragm Wall




- Barrettes are rectangular piles with typical width 0.8,1.0,1.2 m, length 2.8-3.0 m, and depth up to 80 m.
- D-wall is used for soil retaining system e.g. permanent wall of deep basement, underpass tunnel, subway station, etc.



Jet Grouting



- For soil improvement both stability and strength :
road works, airport runway, slope protection, dam, etc.

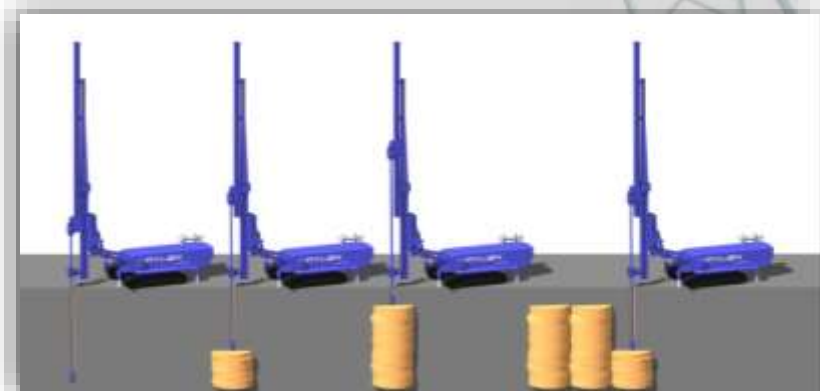

Executives



Dr. Chanet Sangarayakul

President

Age : 50

Education :

- Doctor of Engineering (structure), Asian Institute of Technology
- Master of Engineering (structure), Asian Institute of Technology
- Bachelor of Engineering (civil), Chulalongkorn University



Mr. Pisun Sirisuksakulchai

Senior Executive Vice President

Age : 50

Education :

- Master of Art in Business Law, Chulalongkorn University
- Master of Business Administration(MBA), Rockhurst University (USA)
- Master of Science (Construction Management), University of Wisconsin-Madison (USA)
- Bachelor of Engineering (civil), Chulalongkorn University



Mr. Bordin Sangarayakul

Senior Executive Vice President

Age : 49

Education :

- Master of Science (Construction Engineering and Management), Virginia Tech (USA)
- Bachelor of Engineering (civil), Chulalongkorn University



Mr. Somsak Viriyapipat

Senior Executive Vice President

Age : 65

Education :

- Bachelor of Engineering (mechanic), King Mongkut's Institute of Technology North Bangkok



Company Achievements



- We are listed in SET.
(The Stock Exchange of Thailand)

- We are selected as one of the
“Best under a Billion” by
Forbes Asia in 2014, 2019 & 2020



Company Achievements



➤ SET AWARDS:



2009 **"Top Corporate Governance Report"**

2019 **"Outstanding Company Performance"**

2019 **"Outstanding CEO"**

➤ **"Excellent CG score"**

from SET since 2016 - 2023



➤ We are certified and a member of

Thailand's Private Sector Collective Action Coalition Against Corruption



ISO 9001:2015 Certification



Certificate TH22/00000803



The management system of
PYLON PUBLIC COMPANY LIMITED

252 SPE Tower Building, 14th floor, Phaholyothin Road, Sam Sen Nai Subdistrict, Phayathai District, Bangkok 10400, Thailand

has been assessed and certified as meeting the requirements of
ISO 9001:2015

For the following activities
Construction and Project Management of Bored Pile, Barrette Pile, and Diaphragm Wall Works

This certificate is valid from 28 October 2022 until 28 October 2025 and remains valid subject to satisfactory surveillance audits.
Issue 1. Certified since 28 October 2022

Authorised by
Jonathan Hall
Global Head - Certification Services

SGS United Kingdom Ltd
Rugbyside Business Park, Oldcotes Park, Cheshire, CH63 3BN, UK
t +44 (0)161 550-6005 - www.sgs.com



This document is an authentic electronic certificate for Client business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on Terms and Conditions (SGS). Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses contained therein. This document is copyright protected and any unauthorised alteration, forgery or falsification of the content or appearance of this document is unlawful.



Certificate TH22/00000804



The management system of
PYLON PUBLIC COMPANY LIMITED

252 SPE Tower Building, 14th floor, Phaholyothin Road, Sam Sen Nai Subdistrict, Phayathai District, Bangkok 10400, Thailand

has been assessed and certified as meeting the requirements of
ISO 9001:2015

For the following activities
Construction and Project Management of Bored Pile, Barrette Pile, and Diaphragm Wall Works

This certificate is valid from 28 October 2022 until 28 October 2025 and remains valid subject to satisfactory surveillance audits.
Issue 1. Certified since 28 October 2022

Authorised by
Montree Tanglermanikul

SGS (Thailand) Limited
180 Nanglochoe Road Changchotee Therasak, Bangkok 10126 Thailand
t +66 (0)2 678 1813 - www.sgs.com



This document is an authentic electronic certificate for Client business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on Terms and Conditions (SGS). Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses contained therein. This document is copyright protected and any unauthorised alteration, forgery or falsification of the content or appearance of this document is unlawful.



Company Financial Information



➤ Registered Capital = 374.94 MB

Unit : M.Baht

Period as of	Y/E 2020 31 Dec 2020	Y/E 2021 31 Dec 2021	Y/E 2022 31 Dec 2022	Y/E 2023 31 Dec 2023	6M/2024 30 Jun 2024
Financial Data					
Assets	1,320.79	1,212.32	1,278.96	1,268.81	1,097.49
Liabilities	274.26	234.81	226.65	222.64	161.83
Equity	1,046.53	977.51	1,052.31	1,046.17	935.66
Paid-up Capital	374.94	374.94	374.94	374.94	374.94
Revenue	1,424.86	793.87	1,157.73	1,486.89	369.08
Profit (Loss) from Other Activities	1.70	1.48	2.09	3.85	3.21
Net Profit	182.54	39.76	119.79	106.34	-5.53
EPS (Baht)	0.24	0.05	0.16	0.14	-0.01
Financial Ratio					
ROA (%)	14.58	3.68	11.88	10.35	2.93
ROE (%)	17.27	3.93	11.80	10.13	2.93
Net Profit Margin (%)	12.81	5.01	10.35	7.15	-1.50

Project Highlight



Queen Sirikit National Convention Center
Bored Piles / Pile walls
/ D-Wall



Northpole
Bored Piles / D-Wall



Wan Vela
Bored Piles



Cloud 11
Bored Piles / Pile walls
/ D-Wall



The ICONSIAM
Bored Piles / Jet Grouting



Samyarn Mitrtown
Bored Piles / D-Wall



Airport Rail Link
Bored Piles



EGAT Car park & HQ
Bored Piles /
Constructions



MRT Yellow & Pink Line
Bored Piles /
Barrette Pile



Landmark Waterfront
Bored Piles / Jet
Grouting

Project Highlight



ShowDC
Bored Piles



Central Westgate
Bored Piles



Siam Square One
Bored Piles



The One Residence
Bored Piles



AIA - CMC
Bored Piles



One9Five Rama9
Bored Piles



Klong Suvarnabhum
Jet Grouting



TC Green I/II
Bored Piles



IKEA Westgate
Bored Piles



Wimutti Hospital
Bored Piles/Barrette Piles/
D-Wall

Project Highlight



Metro Avenue
Bored Piles



South Interchange
Bored Piles



Le Luk Condo (A+B)
Bored Piles



Starview
Bored Piles



Thai National Assembly
Bored Piles



AIA - Sathorn
Bored Piles



Amanta Condo Rama4
Bored Piles



Suwanbabhumi
Fire Rescue Stations
Jet Grouting



Circle Living Prototype
Bored Piles



BMA Building
Bored Piles

Project Highlight



AP Groups



Life Asoke-Rama9
Bored Piles



Life Asoke
Bored Piles



Aspire Erawan
Bored Piles



Life on wireless
Bored Piles

LPN Development



Lumpini Park Rama9
Bored Piles



L.P.N. Ville Nakorn In
Bored Piles



L.P.N. Beach Jomtien
Bored Piles



L.P.N. Phetkasem 98
Bored Piles

Project Highlight



Pruksa Real Estate



Plum Condo Ph.1-2
Bored Piles



Privacy Rama9
Bored Piles



Tree Interchange
Bored Piles



Chapter One
Bored Piles

Ananda Development



Buddha Port
Bored Piles



Asthon Residence 41
Bored Piles



IDEO Q Chidlom
Bored Piles



IDEO Mobi Rama 9
Bored Piles

Project Highlight



Narai Property



Parkland Charan
Bored Piles



**Parkland Ratchada-
Wongsawang**
Bored Piles



**Parkland
Phetkasem56**
Bored Piles



**Parkland
Phetkasem-Taphra**
Bored Piles

Major Development



Muniq SK23
Bored Piles



Metris Ladprao
Bored Piles



Maestro07
Bored Piles



Maestro19
Bored Piles

Ongoing Projects

Hatai Silom (Narai Hotel)



Construction Period: 18/06/24 - Present

Bored Piles

Ø 0.60 m. depth 16 m. 80 Nos
Ø 1.00 m. depth 65 m. 104 Nos
Ø 1.20 m. depth 65 m. 64 Nos
Ø 1.50 m. depth 65 m. 117 Nos

D-Wall

0.80 m. thk. x 40 m. depth 186.15 m.
1.00 m. thk. x 40 m. depth. 209.10 m.

Stanchion Pile

H350x350 104 Nos

Ongoing Projects

Hatai Silom (Narai Hotel)



Ongoing Projects

Hatai Silom (Narai Hotel)



Ongoing Projects

Hatai Silom (Narai Hotel)



Ongoing Projects

Hatai Silom (Narai Hotel)



Ongoing Projects

Hatai Silom (Narai Hotel)



Ongoing Projects

Embassy Wireless



Construction Period: 18/06/24 - Present

Bored Piles

Ø 1.00 m. depth 65 m. 14 Nos
Ø 1.20 m. depth 65 m. 128 Nos
Ø 1.20 m. depth 70 m. 33 Nos
Ø 1.50 m. depth 65 m. 2 Nos

D-Wall

0.80 m.thk. x 23 m. depth 200.65 m.

Barrette

Ø 0.80x2.50 m. depth 65 m. 15 Nos


Ongoing Projects

Embassy Wireless



Ongoing Projects

Embassy Wireless

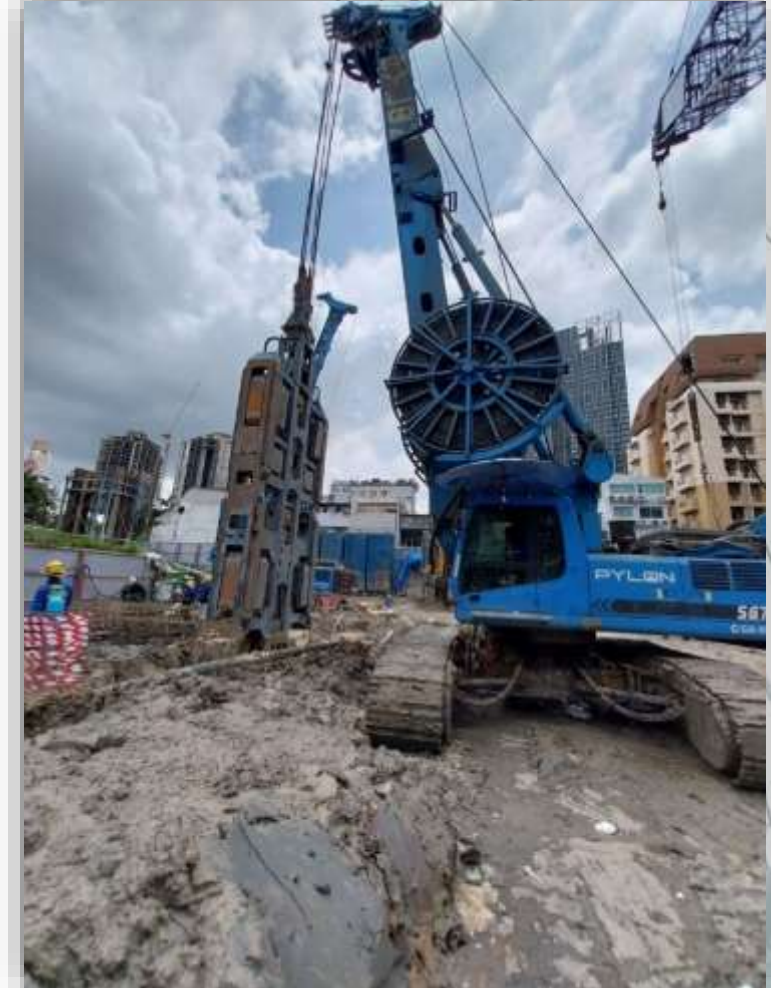

Ongoing Projects

Embassy Wireless



Upcoming Project

Project O Commercial



Construction Period: November 2024


Bored Piles

Ø 1.20 m. depth 68 m. 184 Nos

Ø 1.50 m. depth 68 m. 34 Nos

D-Wall

1.00 m. thk. x 44 m. depth 292.71m.

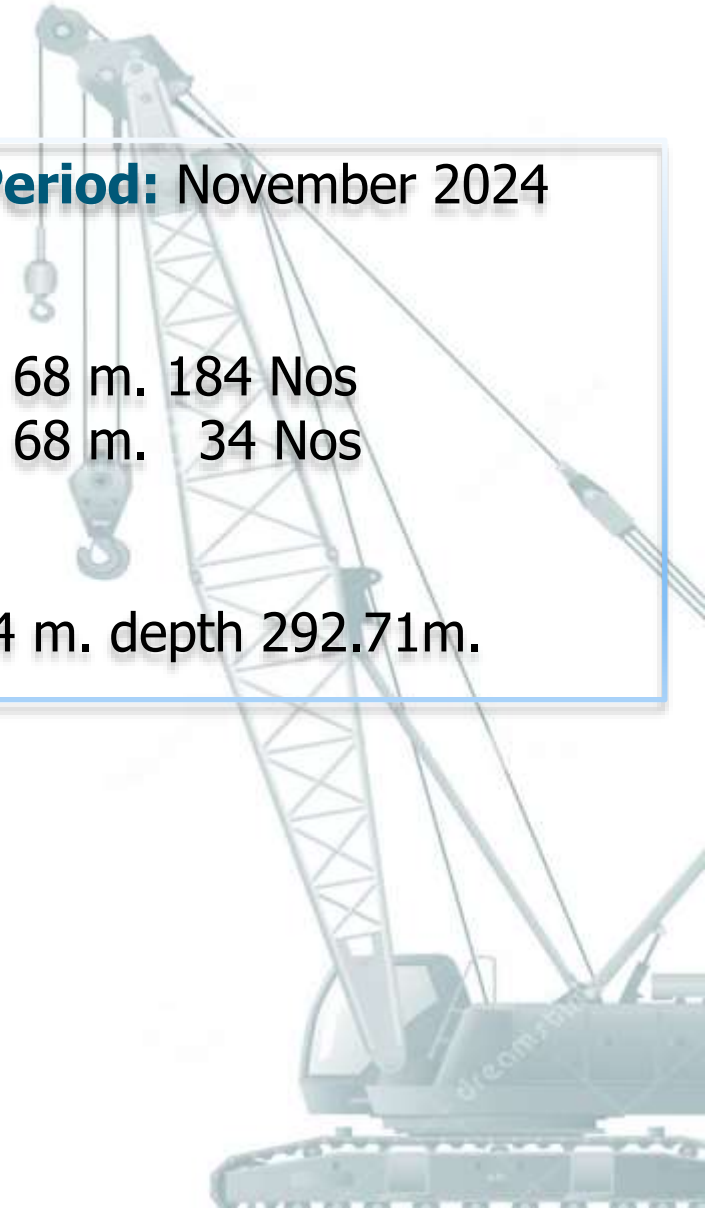

Project Highlight



Queen Sirikit National Convention Center



Construction Period: 03/10/19 - 26/02/20

Bored Piles

Ø 1.00 m. depth 64 m. 263 Nos
Ø 1.20 m. depth 64 m. 285 Nos
Ø 1.50 m. depth 64 m. 387 Nos

Pile Wall

Ø 1.20 m. depth 28 m. 248 Nos
Ø 1.20 m. depth 30 m. 117 Nos

D-Wall

1.00 m. thk. x 30 m. depth 928.52 m.

Pile Leg

Ø 1.00 m. depth 64 m. 78 Nos

Project Highlight

Queen Sirikit National Convention Center



Project Highlight



Queen Sirikit National Convention Center



Project Highlight

Cloud 11



Construction Period: 9/02/22 - 27/08/22

Bored Piles

Ø 1.20 m. Depth 70 m. 45 Nos

Ø 1.50 m. Depth 70 m. 738 Nos

Pile Wall

Ø 0.80 m. Depth 18 m. 58 Nos

Ø 0.80 m. Depth 20 m. 33 Nos

Ø 0.60 m. Depth 18 m. 983 Nos

Ø 1.00 m. Depth 20 m. 123 Nos

D-Wall

0.80 m. thk. x 23 m. depth 717.19 m.

0.80 m. thk. x 30 m. depth 503.07 m.

Project Highlight

Cloud 11



Project Highlight

Cloud 11



Project Highlight

North Pole



Construction Period: 19/12/22 - 18/11/23

Bored Piles

Ø 0.60 m. depth 22 m. 64 Nos
Ø 1.20 m. depth 45 m. 92 Nos
Ø 1.50 m. depth 70 m. 186 Nos
Ø 1.80 m. depth 70 m. 285 Nos

D-Wall

0.80 m. thk. x 22 m. depth 259.56 m.
1.00 m. thk. x 22 m. depth 182.67 m.
1.20 m. thk. x 22 m. depth 155.43 m.
1.00 m. thk. x 70 m. depth 33.00 m.

Project Highlight

North Pole



Project Highlight

North Pole



Project Highlight

North Pole



Project Highlight

MRT Yellow Line



Construction Period: 02/08/18 – 15/11/19


Bored Piles

Ø 1.50 m. depth 49 m. 362 Nos

Ø 1.80 m. depth 49 m. 221 Nos

Barrette

1.20x3.0 m. depth 49 m. 176 Nos

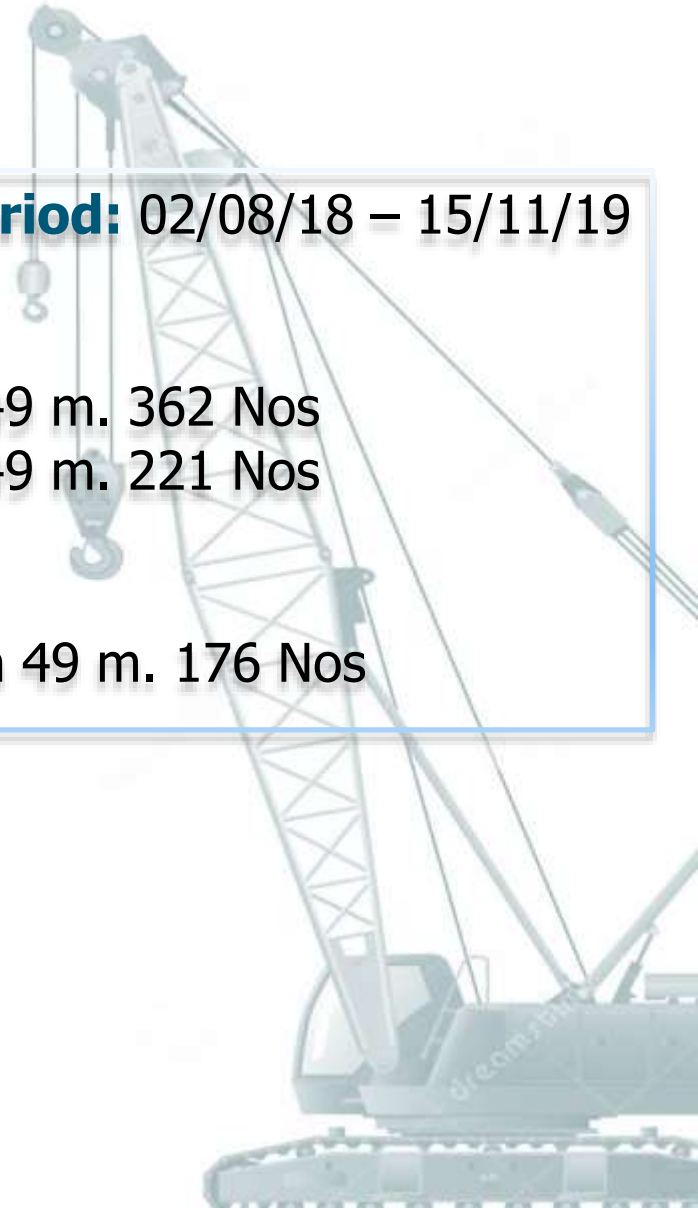

Project Highlight

MRT Yellow Line



Project Highlight

MRT Yellow Line



Project Highlight

MRT Yellow Line



Project Highlight

MRT Pink Line




Construction Period: 03/09/21 – 05/12/21

Bored Piles

Ø 2.00 m. depth 37-41 m. 7 Nos

Barrette

Ø 1.20x3.0 m. depth 46-58 m. 128 Nos

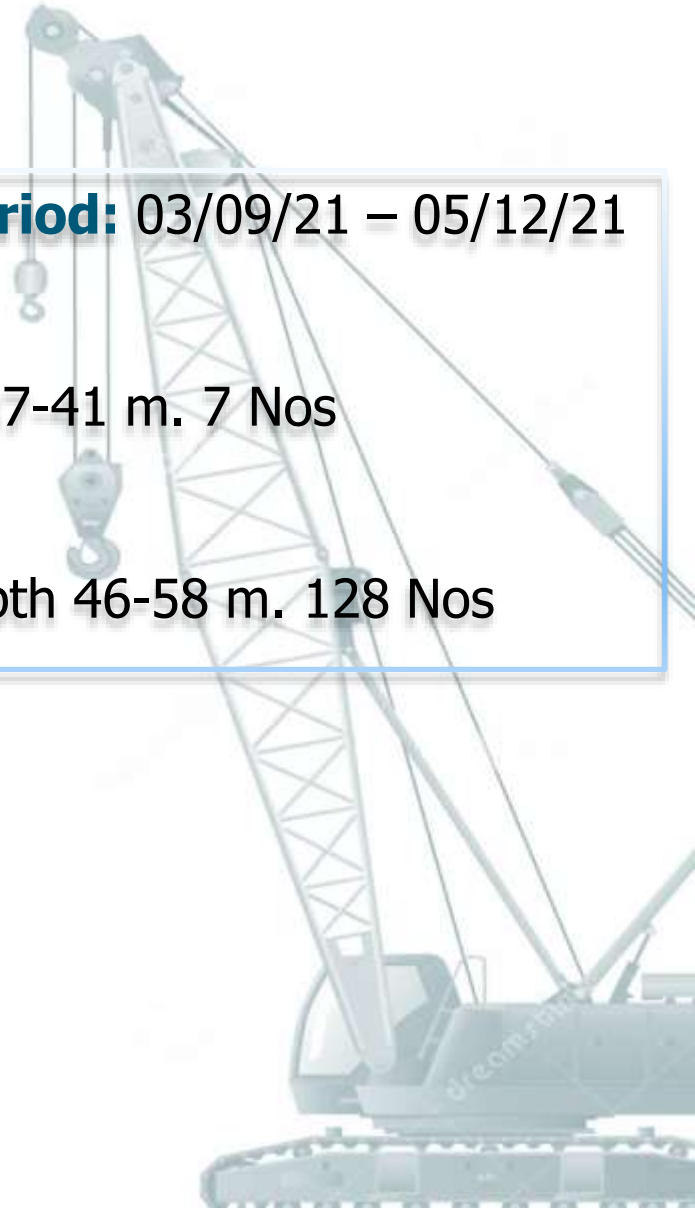

Project Highlight

MRT Pink Line



Project Highlight

MRT Pink Line



Project Highlight



ทางพิเศษพระราม 3 – ดาวคะนอง
วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก สัญญาที่ 1, 2




Construction Period: 01/07/20 - 31/01/23

Barrette

1.00x3.00 m. depth 55-62 m. 195 Nos

1.00x3.80 m. depth 54-62 m. 265 Nos

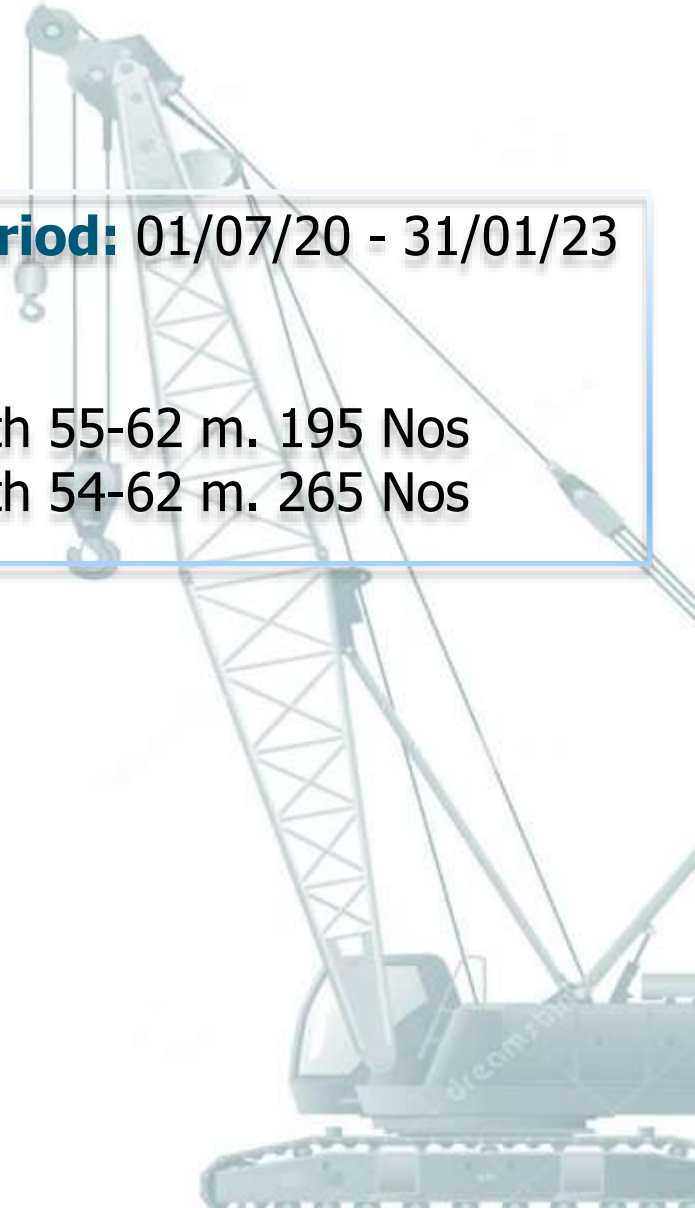

Project Highlight

ทางพิเศษพระราม 3 – ดาวคะนอง วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก สัญญาที่ 1, 2



Project Highlight

ทางพิเศษพระราม 3 – ดาวคะนอง วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก สัญญาที่ 1, 2



Project Highlight

ทางพิเศษพระราม 3 – ดาวคะนอง วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก สัญญาที่ 1, 2



Project Highlight

ทางพิเศษพระราม 3 – ดาวคะนอง วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก สัญญาที่ 1, 2



Project Highlight

Samyan Mitrtown



Construction Period: 11/11/16 - 27/12/16

Bored Piles

Ø 1.20 m. depth 64 m. 45 Nos

Ø 1.50 m. depth 64 m. 386 Nos

D-Wall

0.80 m. thk. x 18 m. depth 479.46 m.

Pile Leg

Ø 0.80 m. depth 64 m. 50 Nos

Project Highlight

Samyan Mitrtown



Project Highlight

Samyan Mitrtown



Project Highlight

Conner Ratchathewi



Construction Period: 03/08/19- 24/11/19

Bored Piles

Ø 0.80 m. depth 55 m. 38 Nos

Ø 1.00 m. depth 55 m. 39 Nos

Ø 1.20 m. depth 55 m. 23 Nos

D-Wall

0.80 m. thk. x 18 m. depth 98.30 m.

Barrette

0.80x3.00 m. depth 55 m. 11 Nos

Pile Leg

Ø 0.80 m. depth 55 m. 9 Nos

Project Highlight

Conner Ratchathewi



Project Highlight

Conner Ratchathewi



Project Highlight



Hyatt House Asoke Sukhumvit 23



Construction Period: 20/04/23 - 17/10/23


Bored Piles

Ø 0.80 m. depth 64 m. 5 Nos

Ø 1.50 m. depth 64 m. 64 Nos

D-Wall

1.00 m. thk. x 31 m. depth 146.20 m.

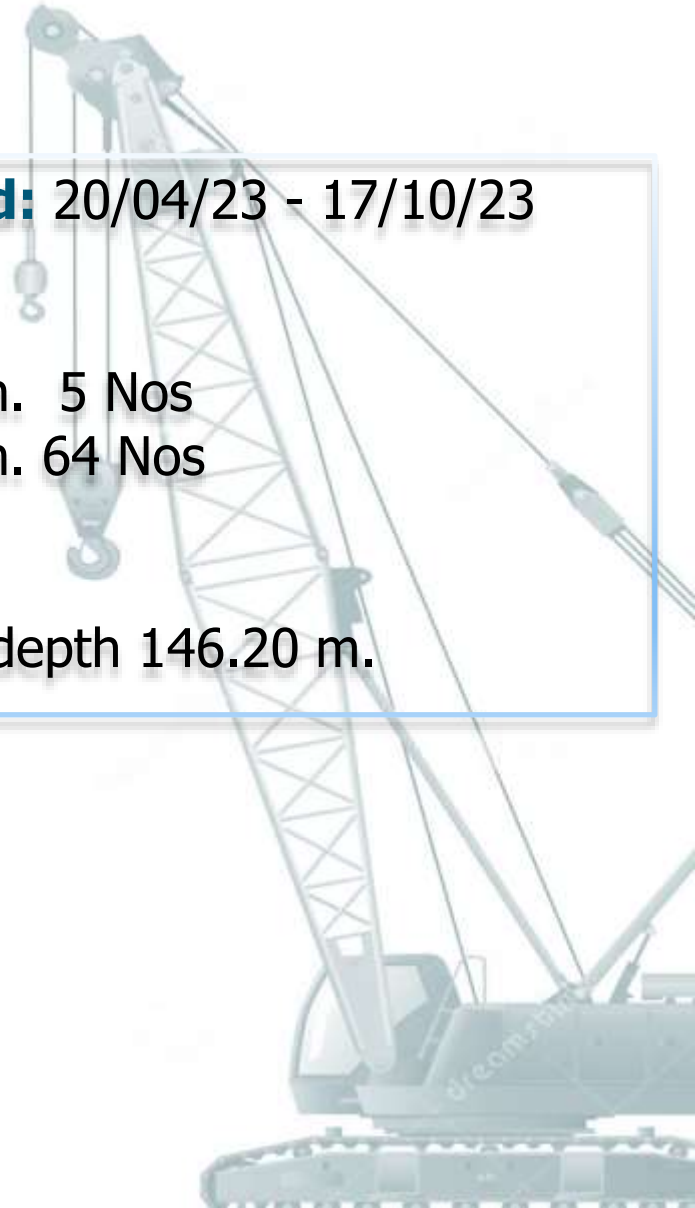

Project Highlight

Hyatt House Asoke Sukhumvit 23



Project Highlight

Hyatt House Asoke Sukhumvit 23




Project Highlight

Hyatt House Asoke Sukhumvit 23



Project Highlight

Hyatt House Asoke Sukhumvit 23

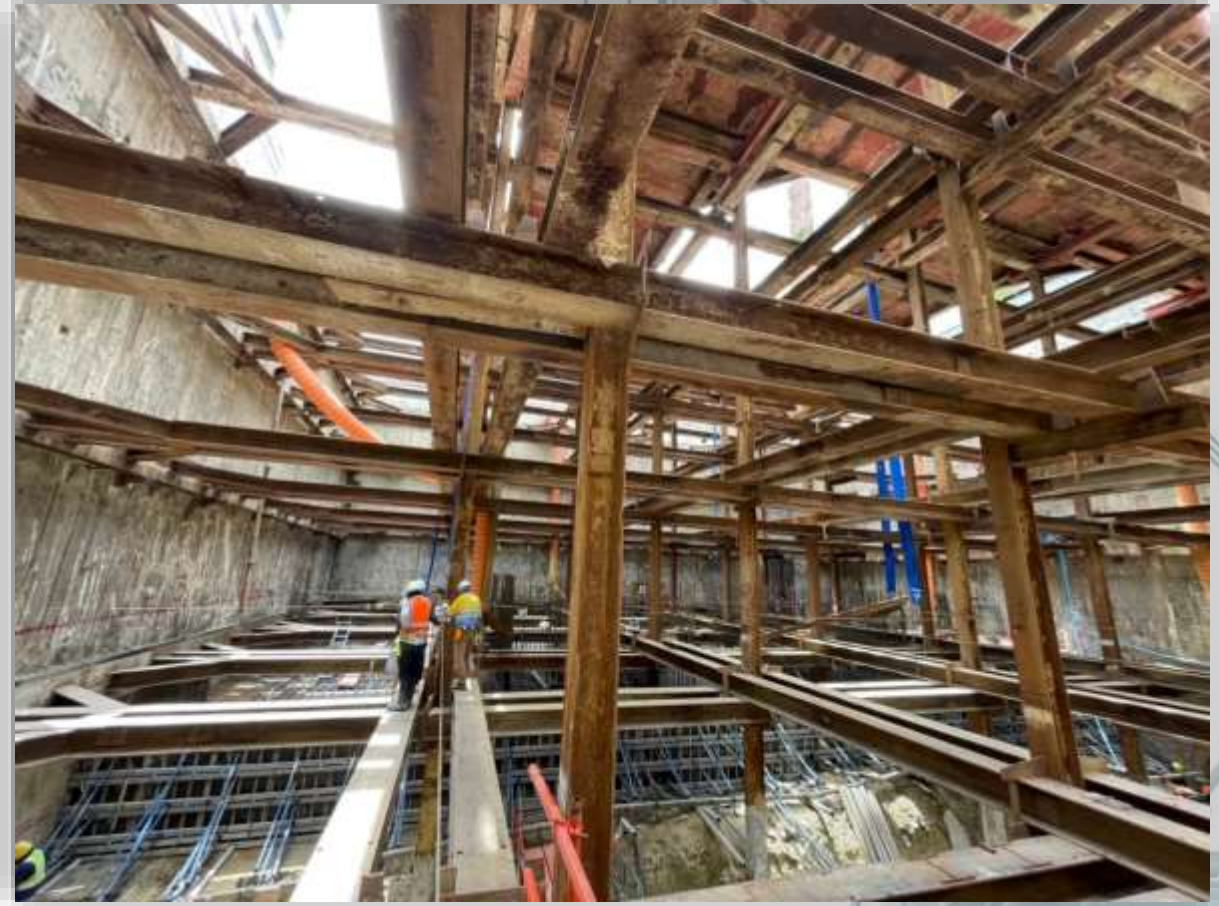

Project Highlight

Ratchathewi



Construction Period: 26/08/23 - 20/01/24

Bored Piles

Ø 1.20 m. depth 70 m. 111 Nos

D-Wall

0.80 m. thk. x 22 m. depth 112 m.

0.80 m. thk. x 24 m. depth 43 m.

Project Highlight

125 Sathorn



Construction Period: 20/02/23 - 02/08/23

Bored Piles

Ø 1.00 m. depth 55 m. 103 Nos

Ø 1.20 m. depth 55 m. 105 Nos

D-Wall

0.80 m. thk. x 20 m. depth 249 m.

0.80 m. thk. x 22 m. depth 36 m.

Barrette

0.80x3.0 m. depth 60 m. 29 Nos

Project Highlight

125 Sathorn



Project Highlight

125 Sathorn



Project Highlight

Summit Tower



Construction Period: 06/08/21 - 04/12/21

Bored Piles

Ø 1.00 m. depth 70 m. 39 Nos
Ø 1.20 m. depth 70 m. 48 Nos
Ø 1.50 m. depth 70 m. 148 Nos

D-Wall

0.80 m. thk. x 22 m. depth 305 m.

Barrette

Ø 1.00x3.00 m. depth 70 m. 4 Nos

Project Highlight

Summit Tower



Project Highlight

Summit Tower



Project Highlight

Summit Tower



Project Highlight

Summit Tower



Efficiency & Quality : Pylon Pile Application



To increase **efficiency and quality**



Collect data

- Data centralization
- Paperless
- Real-time key in
- Reporting



Process and Quality Control

- Standardization
- Identify the key check-points
- Approval process



Productivity and Budget Control


- Work progress
- Material control
- Machine utilization

Problem solving

- Real-time detection of problems
- Troubleshooting promptly
- Real-time tracking



Efficiency & Quality : Pylon Pile Application

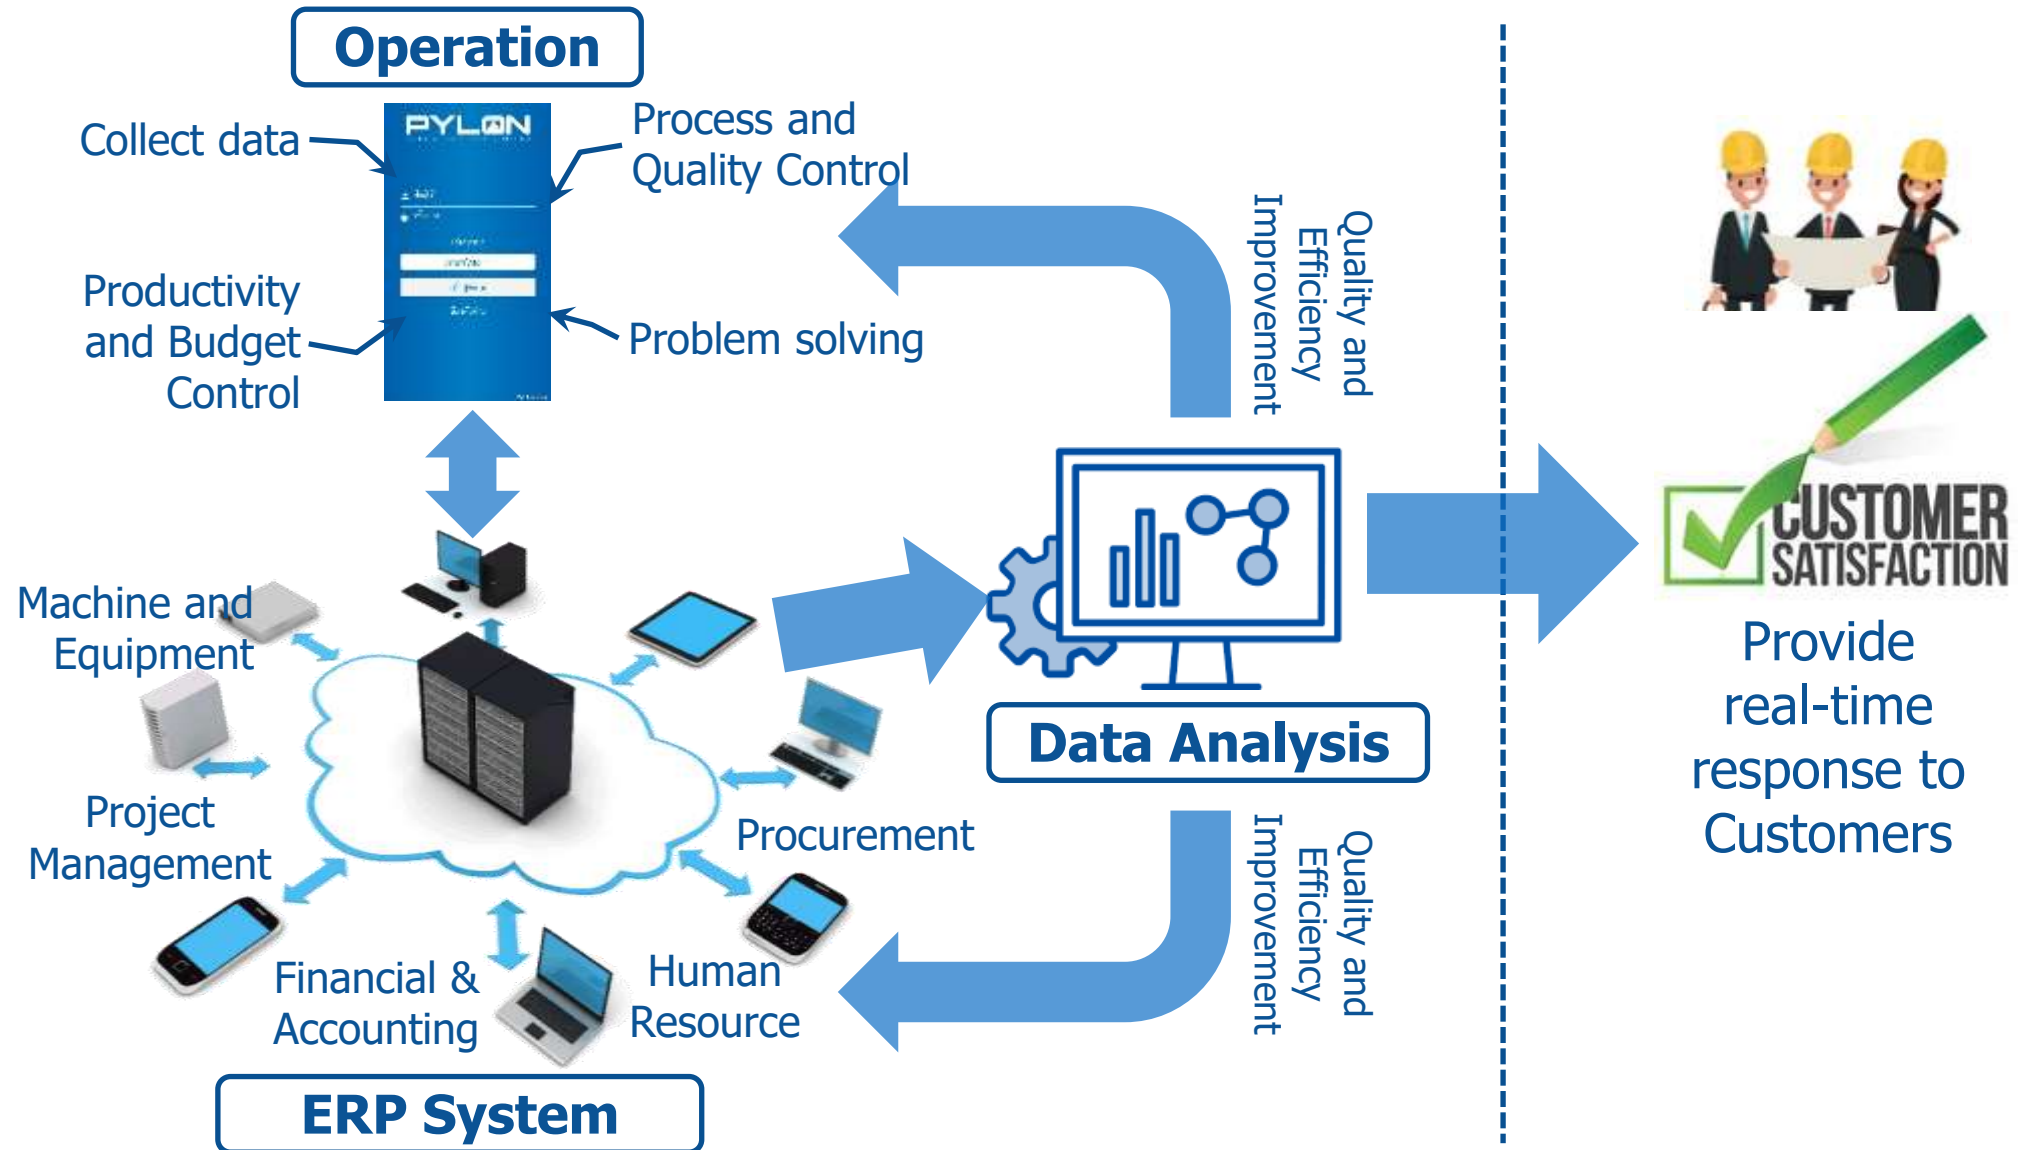

Projects Completed



PROJECTS COMPLETED 2024

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
1	Hyatt House Asoke Sukhumvit 23 (Stanchion Pile and H-Beam Installation)	Industrial Ring Road	(Bored Pile) Ø 0.80 Ø 0.80	22.9 24.4	17 3	3,300,000.00	Sangfah Construction Co., Ltd.	30/01/23 - 28/04/23
2	Thai Group Quarter	Surawong Road	(Bored Pile) Ø 1.00 Ø 1.20 Ø 1.35	63 63 63	65 38 14	46,000,000.00	Southeast Life Insurance PLC.	22/02/24 - 04/05/24
3	PR 3	Industrial Ring Road	(Dry Process) Ø 0.50 Ø 0.80 (Bored Pile) Ø 1.00 Ø 1.20 Ø 1.35 Ø 1.50	21 55 55 55 55 55	167 11 175 47 4 4	72,600,000.00	Country Group Development PCL.	17/02/24 - 20/04/24
4	อาคารส่วนต่อขยายและอาคารบริการ โรงพยาบาลกรุงเทพหัวหิน	Prachuap Khiri Khan	(Bored Pile) Ø 0.60 Ø 0.80	15 15	22 146	19,000,000.00	Bangkok Dusit Medical Services PLC.	24/04/24 - 25/06/24
5	อาคารโรงพยาบาลเชียงใหม่ราม 2	Lampang-Chiang Mai SuperHighway Road	(Bored Pile) Ø 0.80	32	189	30,600,000.00	Ramkhamhaeng Chiangmai Hospital Co., Ltd.	09/03/24 - 09/05/24
6	Aspire Huai Khwang	Pracha Songkhro Road	(Bored Pile) Ø 1.00 Ø 1.20	57 57	137 138	31,625,000.00	AP (Thailand) Public Co., Ltd.	06/09/24 - 01/11/24

Projects Completed



PROJECTS COMPLETED 2024

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
7	New Parking Building, Future Park Rangsit	Phaholyothin Road	(Bored Pile) Ø 0.80 Ø 1.20	52 52	227 21	16,800,000.00	C.E.S. Co., Ltd.	24/04/24 - 22/08/24
8	Marquis Phayathai (MQS PYT)	Phayathai Road	(Bored Pile) Ø 1.00 (Pile Wall) Ø 0.8	55 18	129 207	46,400,000.00	Intelligence Development Co., Ltd.	09/04/24 - 30/07/24
9	Life Charoennakhorn - Sathorn	Charoennakhon Road	(Bored Pile) Ø 1.00	51	109	10,700,000.00	AP (Thailand) Public Co., Ltd.	10/08/24 - 16/09/24
10	Hatai, Silom Bangkok	Silom Road	(Bored Pile) Ø 0.60 Ø 1.00 Ø 1.20 Ø 1.50 (Stanchion Pile) Ø 1.00 (D-Wall) 0.80 thk. 1.00 thk.	16 65 65 65 65 40 40	80 104 64 117 104 186.15 m. 209.10 m.		Narai Hotel Co., Ltd.	18/06/24 -
11	อาคารจอดรถศาลเจ้าใต้ong (สาทร)	Charoenrat Road	(Bored Pile) Ø 0.80	31	112	6,400,000.00	C.E.S. Co., Ltd.	20/05/24 - 17/08/24

Projects Completed



PROJECTS COMPLETED 2024

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
12	Embassy Wireless	Wireless Road	(Bored Pile) Ø 1.00 Ø 1.20 Ø 1.20 Ø 1.50 (D-Wall) 0.80 thk. (Barrette) 0.80x2.50	65 65 70 65 23 65	14 128 33 2 200.65m. 15	141,450,000.00	HKL Noble (Wireless) Co., Ltd.	18/06/24 - 22/10/24
13	Evolution Data Centres, Bangna	Bangna-Trad Road	(Bored Pile) Ø 0.80 Ø 1.20	42 42	33 109	41,400,000.00	Evolution DC (Thailand) Co., Ltd.	06/07/24 - 11/09/24
14	LPS Sukhumvit 11	Sukhumvit Road	(Bored Pile) Ø 0.60 Ø 0.80	30 30	16 36	7,000,000.00	The Iconic Sukhumvit Co., Ltd.	03/07/24 - 26/07/24
15	Sky Ground Residence	Sukhumvit Road	(Bored Pile) Ø 0.60	39	159	9,000,000.00	C.E.S. Co., Ltd.	28/06/24 - 16/08/24

Projects Completed



PROJECTS COMPLETED 2023

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
1	Culture Thonglor	Sukhumvit Road	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20	59 59 59	36 82 11	30,500,000.00	Ananda Development PLC.	30/01/23 - 28/04/23
2	NEXT 01	Bangna Trad Road	(Bored Pile) Ø 1.50	60	154	95,000,000.00	GSA Data Center Co., Ltd.	19/02/23 - 10/04/23
3	Hyatt House Asoke Sukhumvit 23	Sukhumvit Road	(Bored Pile) Ø 1.20 Ø 1.50 (D-Wall) Ø 1.00	64 64 31	5 64 146.2 m.	92,000,000.00	Insaf Prasarnmit Co., Ltd.	20/04/23 - 17/10/23
4	Quintara Mhy'Den Pho Nimit	Taksin phetkasem Rd.	(Bored Pile) Ø 1.00	66	159	50,600,000.00	Eastern Star Real Estate Public Co., Ltd.	04/04/23 - 02/06/23
5	U.S. Embassy-Bangkok, Thailand	Wireless Road	(Bored Pile) Ø 0.80	28-42	48	8,000,000.00	B.L. Harbert International	21/04/23 - 06/06/23
6	Aspire Vibha - Victory	Asoke-Dindang Road	(Bored Pile) Ø 1.00	52	128	13,000,000.00	AP (Thailand) Public Co., Ltd.	09/12/23 - 17/01/24
7	Modiz Rhyme Cloud	Ramkhamhaeng Road	(Bored Pile) Ø 0.80 Ø 1.00	60 60	4 198	54,300,000.00	Asset Wise Public Co., Ltd.	26/07/23 - 14/10/23

Projects Completed



PROJECTS COMPLETED 2023

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
8	Atmind Sukhumvit 19 Hotel	Sukhumvit Road	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.00 (Pile Wall) Ø 0.80	52 52 52 25	12 21 25 124	42,400,000.00	Krong Thong Villa Co., Ltd.	21/07/23 - 25/11/23
9	Plum Condo Central Station Phase 4	Rattana Thibet Road	(Bored Pile) Ø 0.60 Ø 0.80	36 36	33 148	48,000,000.00	Pruksa Real Estate Public Co., Ltd.	02/09/23 - 20/10/23
10	NIST International School	Sukhumvit Road	(Bored Pile) Ø 0.60 Ø 0.80	36 36	173 208	41,000,000.00	NIST International School	05/10/23 - 30/11/23
11	Niche Pride Somdet Chao Phraya	Somdet Chao Phraya Road	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20 (Pile Wall) Ø 0.80	52 52 52 20.5	5 33 16 139	13,000,000.00	Sena Development Public Co., Ltd.	07/09/23 - 25/12/23
12	The Base Rama 9	Rama 9 Road	(Bored Pile) Ø 1.00 Ø 1.20	53 53	24 49	20,900,000.00	Sansiri Public Co., Ltd.	05/08/23 - 08/09/23

Projects Completed



PROJECTS COMPLETED 2023

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
13	Ratchathewi	Phayathai Road	(Bored Pile) Ø 1.20 (D-Wall) 0.80 thk. 0.80 thk.	70 22 24	111 112 m. 43 m.	69,000,000.00	Teka Construction Public Co., Ltd.	26/08/23 - 20/01/24
14	St.Stephen's International School	Vibhavadi Rangsit Rd.	(Bored Pile) Ø 0.80 Ø 1.00	36 36	291 58	43,000,000.00	Hands Management Co., Ltd.	12/09/23 - 31/10/23
15	Rhythm Charoennakorn Iconic	Charoennakorn Road	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20	52 52 52	14 44 85	16,500,000.00	AP (Thailand) Public Co., Ltd.	03/04/24 - 27/05/24
16	Noww Mega	Mega Bangna Road	(Bored Pile) Ø 1.00 Ø 1.50	63 63	16 155		Areeya Property Public Co., Ltd.	
17	Pan Pacific Bangkok	Sukhumvit Road	(Bored Pile) Ø 1.00 Ø 1.50 (Pile Wall) Ø 1.00	55 55 22	18 37 153	50,000,000.00	Piyasombat Thong Co., Ltd.	30/10/23 - 03/05/24
18	Flora Villa VIP Building	Bangkok Patumthani Rd.	(Bored Pile) Ø 0.60	26	50	11,500,000.00	Bouygues Thai Limited	18/10/23 - 04/11/23

PROJECTS COMPLETED 2023

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
19	Wanvayla Na Chaophraya	Nakhon Chaisi Road	(Bored Pile) Ø 0.60 Ø 1.00 Ø 1.20 Ø 1.50	26 62 62 62	185 45 141 289	240,400,000.00	Land and Houses PLC.	15/11/23 - 08/02/24
20	Modiz Voyage Srinakarin	Srinakarin Road	(Bored Pile) Ø 0.80	204	224	15,600,000.00	Assetwise PLC.	20/05/24 - 24/07/24



Projects Completed



PROJECTS COMPLETED 2022

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
1	ทางพิเศษสายพระราม 3 - ดาวคะนอง - วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก (สัญญาที่ 1)	Rama 2 Road	(Barrette) 1.00x3.00 1.00x3.80	55 54	110 158	233,800,000.00	Civil Construction Services & Products Co., Ltd.	24/03/21 - 31/01/23
2	Movenpick BDMS Wellness Resort Bangkok	Wisless Road	(Bored Pile) Ø 0.60 Ø 0.80 (Barrette) 0.80x2.50 (D-Wall) 0.80 thk.	36 36 34 20	2 93 10 128.88 m.	49,400,000.00	BDMS Wellness Clinic Co., Ltd.	13/02/21 - 25/07/21
3	Aspire Sukhumvit - Rama 4	Sukhumvit Road	(Bored Pile) Ø 1.00 Ø 1.20	56 56	10 153	21,300,000.00	AP (Thailand) PLC.	23/09/21 - 16/11/21
4	อาคารที่พักอาศัยข้าราชการตำรวจชั้นสัญญาบัตร สำนักงานตำรวจแห่งชาติ	Watthana Road	(Bored Pile) Ø 0.60 Ø 0.60 Ø 0.60 Ø 1.00 Ø 1.20	18.2 22.7 60 60 60	90 50 295 390 195	80,500,000.00	Vorawisit Co., Ltd.	09/09/21 - 04/11/21
5	ทางพิเศษสายพระราม 3 - ดาวคะนอง - วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก (สัญญาที่ 2)	Rama 2 Road	(Barrette) 1.00x3.00	55	30	25,000,000.00	Chec (Thai) Co., Ltd.	13/09/21 - 05/04/23

Projects Completed



PROJECTS COMPLETED 2022

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
6	Aspire Onnut Station	Sukhumvit Road	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.00 Ø 1.20	40 40 54 54	42 7 11 76	14,400,000.00	AP (Thailand) PLC.	16/01/23 - 31/03/23
7	Grande Centre Point Ratchadamri 2	Ratchadamri Road	(Bored Pile) Ø 1.00 Ø 1.20 (Pile Wall) Ø 0.80	60 60 18	219 35 130	80,000,000.00	LH Mall & Hotel Co., Ltd.	29/11/22 - 13/03/23
8	Xim Rama 3-Suksawat	Suksawat Road	(Bored Pile) Ø 1.00 Ø 1.20	60 60	219 35	37,000,000.00	W&W Property & Development Co.,Ltd.	16/11/22 - 27/01/23
9	King's College International School Bangkok (Phase 3), B7 Building	Ratchadapisek Rd.	(Bored Pile) Ø 0.80 Ø 1.00	50 50	42 74	25,300,000.00	King's College International School Bangkok	17/12/22 - 16/01/23
10	AIA Ratchada 2	Ratchadapisek Rd.	(Bored Pile) Ø 0.80 Ø 0.80 Ø 1.00 Ø 1.20 Ø 1.50	21 50 65 70 70	400 14 107 283 7	234,000,000.00	AIA Co., Ltd.	10/01/23 - 09/05/23

Projects Completed



PROJECTS COMPLETED 2022

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
11	North Pole	Phaholyothin Road	(Bored Pile) Ø 0.60 Ø 1.20 Ø 1.50 Ø 1.80 (D-Wall) 0.80 thk. 1.00 thk. 1.20 thk. 1.00 thk.	22 45 70 70 22 22 22 70	64 92 186 285 259.56 m. 182.67 m. 155.43 m. 33.00 m.	414,000,000.00	Bayswater Co., Ltd.	19/12/22 - 18/11/23
12	125 Sathorn	Sathorn Road	(Bored Pile) Ø 1.00 Ø 1.20 (Barrette) 0.80x3.00 (D-Wall) 0.80 thk. 0.80 thk.	60 60 60 20 22	103 105 29 249 m. 36 m.	140,000,000.00	PMT Property Co., Ltd.	20/02/23 - 02/08/23
13	คลองระบายน้ำหลากบางบาล-บางไทร จังหวัดพระนครศรีอยุธยา	Ayutthaya Province	(Jet Grouting) Ø 1.20	5.25 - 9.25	11,548		Krung Thon Engineers Co., Ltd.	18/03/23 -

Projects Completed



PROJECTS COMPLETED 2021

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
1	Sukhumvit Soi 7 Office (JLK Tower)	Sukhumvit Rd.	(Bored Pile) Ø 1.00 Ø 1.20	58 58	180 48	50,000,000.00	JLK Holding Co., Ltd.	20/1/21 - 24/04/21
2	The Livin Ramkhamhaeng	Ramkhamhaeng Rd.	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20	57 57 57	20 50 213	69,000,000.00	River 21 Co., Ltd.	11/03/21 - 4/06/21
3	MRT Pink Line (Spur Line)	Bond Street Rd.	(Barrette) 1.20x3.00	58	44	40,000,000.00	Sino-Thai Engineering & Construction PLC	3/09/21 - 5/12/21
4	Nue Noble Faichai-Wanglang	Phran Nok Rd.	(Bored Pile) Ø 0.80 Ø 1.00	57 57	14 65	18,200,000.00	Continental City Company Limited	27/07/21 - 22/09/21
5	Nue Noble Ratchada-Ladphrao	Ladprao Rd.	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20	55 55 55	2 41 39	21,800,000.00	Noble Development PLC.	19/05/21 - 13/08/21
6	Life Ladprao Station	Phaholyothin Rd.	(Bored Pile) Ø 1.00 Ø 1.20	52 52	9 116	15,200,000.00	AP (Thailand) PLC.	07/05/64 - 18/06/21
7	อาคารพรรณนิภา 3	Lat Pla Khao Rd.	(Bored Pile) Ø 0.60	25	238	15,800,000.00	Eternal Growal Growth Corporation Co.,Ltd	24/04/21 - 10/06/21

Projects Completed



PROJECTS COMPLETED 2021

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
8	Aspire Rattanathibet 3	Rattanathibet Rd.	(Bored Pile) Ø 1.00 Ø 1.20	45 45	169 38	20,000,000.00	AP (Thailand) PLC.	10/05/21 - 21/06/21
9	Metris District Ladprao	Ladprao Rd.	(Bored Pile) Ø 0.80 Ø 1.00	50 50	52 133	39,100,000.00	Major Development Estate Co., Ltd.	26/05/22 - 05/08/22
10	Plum Condo Sukhumvit 62	Sukhumvit Rd.	(Bored Pile) Ø 0.80	30	167	12,400,000.00	Pruksa Real Estate Public Co., Ltd.	6/10/21 - 17/11/21
11	Bangkok International Preparatory and Secondary School (E, F Building)	Sukhumvit Rd.	(Bored Pile) Ø 0.60 Ø 0.80 Ø 1.00	31 31 31	53 97 25	17,200,000.00	C.E.S Co., Ltd.	17/08/21 - 30/09/21
12	Life Rama4-Asoke	Rama 4 Rd.	(Bored Pile) Ø 1.20	55	176	22,800,000.00	AP (Thailand) PLC.	12/11/21 - 15/01/22
13	Sukhumvit Soi 7 Office (JLK Tower)	Sukhumvit Rd.	(Pile Wall) Ø 1.00 Ø 1.20 Ø 1.20	18 19 21	90 51 23	9,000,000.00	Thai Kajima Co., Ltd.	28/05/21 - 7/08/22
14	Skyrise Avenue Sukhumvit 64 (Phase 1)	Sukhumvit Road	(Bored Pile) Ø 0.80	60	624	106,500,000.00	Conraex 64 Co., Ltd.	11/08/21 - 8/11/21

Projects Completed



PROJECTS COMPLETED 2021


ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
15	Skyrise Avenue Sukhumvit 64 (Phase 2)	Sukhumvit Road	(Bored Pile) Ø 0.80 Ø 1.00	25 45	900 61	64,200,000.00	Conraex 64 Co., Ltd.	12/05/21 - 23/08/21
16	Summit Tower	Rratchathewi Rd.	(Bored Pile) Ø 1.00 Ø 1.20 Ø 1.50 (D-Wall) 0.80 thk. (Barrette) 1.00x3.00	70 70 70 22 70	39 48 148 305 m. 4	161,200,000.00	Bouygues-Thai Ltd.	06/08/21 - 04/12/21
17	Grande Centre Point Lumpini	Rama 4 Rd.	(Bored Pile) Ø 1.00 Ø 1.20 Ø 1.35	56 56 56	336 69 9	101,200,000.00	LH Mall & Hotel Co., Ltd.	16/10/21 - 24/01/22
18	U.S. Embassy-Bangkok, Thailand NOX	Wireless Road	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.80	21-50 40-50 50-60	506 101 53		B.L. Harbert International	19/01/22 -
19	Scope Thonglor	Sukhumvit Rd.	(Bored Pile) Ø 1.00 (Pile Wall) Ø 0.80	55 19	54 123	10,700,000.00	Porn Pra Nakorn Co., Ltd.	19/11/21 - 5/02/22

Projects Completed



PROJECTS COMPLETED 2021

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
20	Na Reva Charoennakhon	Charoennakhon Rd.	(Bored Pile) Ø 0.80 Ø 1.00	57 57	5 84	22,800,000.00	Navarang Asset Co., Ltd.	18/12/21 - 22/02/22
21	Noble Form Thonglor	Sukhumvit Road	(Bored Pile) Ø 0.80 Ø 1.00	16 65	65 64	29,000,000.00	Bouygues-Thai Ltd.	23/12/21 - 22/02/22
22	RB	Sukhumvit Road	(Bored Pile) Ø 1.20 Ø 1.50 (Pile Wall) Ø 0.80 Ø 0.80 Ø 0.60 Ø 1.00 (D-Wall) 0.80 thk. 0.80 thk.	70 70 18 20 18 20 23 30	45 738 58 33 983 123 717.19 m. 503.07 m.	609,500,000.00	Sukhumvit Digital Parks Limited	9/02/22 - 27/08/22

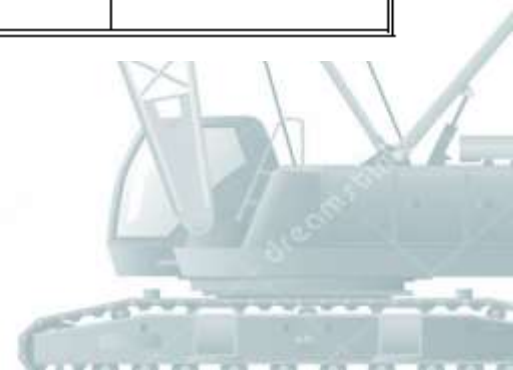

Projects Completed



PROJECTS COMPLETED 2020

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
1	Plan B	Petchburi Soi 36	(Bored Pile) Ø 1.20 Ø 1.35 (D-Wall) 0.80 thk. (Barrette) 0.80x3.00	60 60 24 3	49 6 77.04 m. 16	57,500,000.00	Plan B Media Public Co., Ltd.	18/04/20 - 19/08/20
2	The Most By Nirvana	Itsaraphap Rd.	(Bored Pile) Ø 0.60 Ø 0.80 Ø 1.00	36 36 36	60 26 20	13,400,000.00	Bouygues-Thai Ltd.	26/02/20 - 13/04/20
3	Office Of The National Broadcasting and Telecommunications (Building D, F, G)	Changwattana Rd.	(Bored Pile) (Bldg. D) Ø 0.60 (Bldg. F) Ø 0.80 Ø 1.00 (Bldg. G) Ø 0.80 Ø 1.00	25 40 40 40 40 40	19 24 24 48 12	8,700,000.00	Power Line Engineering Public Co., Ltd.	14/02/20 - 12/04/20
4	MRT Pink Line (PK26) : Nopparat Station	Ramindra Rd.	(Barrette) 1.20x3.00	56	16	15,600,000.00	Sino-Thai Engineering & Construction Public Co., Ltd.	24/02/20 - 25/04/20
5	TAIT 12	Sathorn Soi 12	(Bored Pile) Ø 1.20	60	87	34,000,000.00	Raimon Land Public Co., Ltd.	04/03/20 - 26/05/20

Projects Completed



PROJECTS COMPLETED 2020

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
6	Lumpini Place Tao Poon Interchange	Krungthep - Nonthaburi Rd.	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20	57 57 57	34 68 28	13,800,000.00	L.P.N. Development Public Co., Ltd.	15/04/20 - 26/06/20
7	ทางพิเศษสายพระราม 3 - ดาวคะนอง - วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก (สัญญาที่ 2) (Sta.6+369.090 to Sta.8+271.161)	Rama III - Dao Kanong	(Barrette) 1.00x3.00 1.00x3.80	62 62	55 80	122,000,000.00	Tipakorn Co., Ltd.	1/07/20 - 15/11/21
8	The Rice	Phaholyothin Rd.	(Bored Pile) Ø 1.00 Ø 1.20	61 61	134 38	21,200,000.00	Power Line Engineering Public Co., Ltd.	30/04/20 - 14/07/20
9	MB Sukhumvit 83	Sukhumvit 83 Rd.	(Bored Pile) Ø 0.60 Ø 0.80	35.5 35.5	137 59	23,000,000.00	MB Sukhumvit Co., Ltd.	14/04/20 - 16/04/20
10	Grand Bangkok Rama 8	Rama VIII Rd.	(Bored Pile) Ø 0.35 Ø 0.80	21 35	45 116	13,400,000.00	Amorn Patana Asset Co., Ltd.	26/05/20 - 11/08/20
11	MRT Pink Line (PKS - สายทาง)	Rattanaibet Rd.	(Bored Pile) Ø 2.00	37 - 41	7	4,000,000.00	Sino-Thai Engineering and Construction Public Co., Ltd.	03/05/20 - 14/05/20

Projects Completed



PROJECTS COMPLETED 2020

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
12	FYNN ASOKE	Sukhumvit 10 Rd.	(Bored Pile) Ø 0.80 (Pile Wall) Ø 0.80	54 19	120 224	18,100,000.00	JWS Construction Co., Ltd.	12/05/20 - 16/09/20
14	The Sanctuary Sukhumvit 40	Sukhumvit 40 Rd.	(Bored Pile) Ø 0.60 Ø 0.80	36 36	87 71	15,200,000.00	Daika Estate Co., Ltd.	16/05/20 - 21/7/20
15	AIA East Gateway	Bangna-Trad Rd.	(Bored Pile) Ø 0.60	17	440	12,100,000.00	Thai Obayashi Corporation Limited	14/05/20 - 07/06/20
16	Walden Sukhumvit 39	Sukhumvit Rd.	(Bored Pile) Ø 0.80 Ø 1.00 (Pile Wall) Ø 0.80	45 45 22	40 39 35	20,000,000.00	Habitat Group Co., Ltd.	15/12/20 - 23/03/21
17	Walden Thonglor 8	Sukhumvit Rd.	(Bored Pile) Ø 0.80 Ø 1.00 (Pile Wall) Ø 0.80	45 45 22	93 6 164	37,500,000.00	Habitat Group Co., Ltd.	2/09/20 - 23/12/20
18	Tait 12 (Pile Wall)	Sathorn Soi 12	(Bored Pile) Ø 0.80	18	100	4,200,000.00	Visavapat Co., Ltd.	11/06/20 - 09/07/20

Projects Completed



PROJECTS COMPLETED 2020

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
19	อาคารคลังพัสดุ สถาบันการแพทย์จักรีนฤเบดินทร์ โรงพยาบาลรามาริบัติ	Bangna-Trad Rd.	(Bored Pile) Ø 0.60 Ø 0.80	42 42	14 165	11,000,000.00	Thakorn (2007) Ltd., Partnership	24/06/20 - 02/08/20
20	Dusit D2 Samyan	Sripraya Rd.	(Bored Pile) Ø 1.20 (D-Wall) 0.80 thk. 0.80 thk. (Barrette) 0.80x3.00	60 27 30 60	42 58.84 m. 11.70 m. 12	45,000,000.00	Tian Teck Property Co., Ltd.	10/07/20 - 20/11/20
21	Council of Engineers Thailand (อาคารที่ทำการสภาวิศวกร)	Ladprao Rd.	(Bored Pile) Ø 0.60 Ø 0.80	21 42	32 129	20,000,000.00	Council of Engineers Thailand	04/07/20 - 27/08/20
22	Ramada Mira North Pattaya	Pattaya Nue Rd.	(Bldg. A) (Bored Pile) Ø 1.00 Ø 0.80 (Pile Wall) Ø 0.80 Ø 0.80 Ø 0.80 (Bldg. B) (Bored Pile) Ø 1.00 Ø 0.80 (Bldg. C) (Bored Pile) Ø 0.60	24 24 14 17 24 24 24 24 24 24	151 4 264 48 14 150 10 42	67,900,000.00	Habitat Group Co., Ltd.	19/09/20 - 20/12/20

Projects Completed



PROJECTS COMPLETED 2020

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
23	Cloud Residence Sukhumvit 23	Sukhumvit Rd.	(Bored Pile) Ø 0.80	60	142	24,150,000.00	Risland (Thailand) Co., Ltd.	2/10/20 - 15/01/21
24	A space Mega 2	Bangna Trad Rd.	(Bored Pile) Ø 0.80 Ø 1.20	56 56	15 119	35,000,000.00	Areeya Property Public Co., Ltd.	6/08/20 - 19/10/20
25	Town Hall 49	Sukhumvit Rd.	(Bored Pile) Ø 0.80	45	109	14,200,000.00	Fico Energy 110 Company Limited	7/08/20 - 8/10/20
26	พัฒนาพื้นที่หมอน 33 เขตพาณิชย์สวนหลวง-สามย่าน	Bantadthong Rd.	(Bored Pile) Ø 0.80 Ø 0.80 Ø 1.00 Ø 1.20 Ø 1.35	40 40 60 60 60	11 11 154 49 328	53,000,000.00	Power Line Engineering Public Co., Ltd.	18/08/20 - 27/04/21
27	Nai Lert Park Hotel and Residence Bangkok	Wisless Rd.	(Bored Pile) Ø 1.00 Ø 1.20 Ø 1.20 Ø 1.35 Ø 1.50 Ø 1.50 (Barrette) 0.80x3.00 (D Wall) 0.80 thk. 0.80 thk. 0.80 thk.	65 65 70 70 65 70 70 70 21.5 23 34	38 14 44 7 2 9 4 135.30 m. 49.93 m. 89.45 m.	105,200,000.00	Nai Lert Park Development Co., Ltd.	1/10/20 - 25/02/21

Projects Completed



PROJECTS COMPLETED 2020

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
28	ทางพิเศษสายพระราม 3 - ดาวคะนอง - วงแหวนรอบนอกกรุงเทพมหานครด้านตะวันตก (สัญญาที่ 2) (Sta.6+369.090 to Sta.8+271.161)	Rama III - Dao Kanong	(Barrette) 1.00x3.00	56	27	26,300,000.00	CHEC (Thai) Co., Ltd.	20/10/20 - 24/12/20
29	Hotel Forza Sukhumvit 29	Sukhumvit Rd.	(Bored Pile) Ø 1.00 Ø 1.50 Ø 1.80 (D Wall) 0.80 thk.	56 62 62 20	33 33 4 148.57 m.	52,500,000.00	T.T.S Engineering (2004) Co., Ltd.	14/11/20 - 1/04/21
30	Escent Rayong 2	Rayong	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20 Ø 1.00 Ø 1.20	45 45 45 50 50	16 26 17 10 18	23,000,000.00	CPN Residence Co., Ltd.	14/01/21 - 15/03/21
31	PUNN	Dindaeng Rd.	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20	57 57 57	19 13 95	12,000,000.00	Dolsiri Development Co., Ltd.	25/12/20 - 01/04/21
32	Scope Promsri	Sukhumvit Rd.	(Pile Wall) Ø 0.80 (Bored Pile) Ø 0.60	19 37	168 153	13,000,000.00	Porn Pra Nakorn Co., Ltd.	17/12/20 - 01/04/21

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
1	Bangkok Mall	Bangna-Trad km. 1 Rd.	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20 Ø 1.35 Ø 1.50 Ø 1.65 Ø 1.80 (Pile Wall Type 1) Ø 0.80 (Pile Wall Type 2) Ø 0.80 (Pile Wall Type 3) Ø 0.80 (D- Wall) 0.80 thk.	62 62 62 62 62 62 62 24 24 23.5 23.5	11 23 17 147 427 6 1 183 122 255 44	150,200,000.00	Bangna Shopping Complex Co., Ltd.	08/04/19 - 05/03/20
2	Terminal 21 Rama 3	Rama III Rd.	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20 (Pile Wall) Ø 0.80	60 60 60 18.5	87 288 132 172	138,000,000.00	LH Mall & Hotel Co., Ltd.	02/02/19 - 08/05/19
3	Best Western Nada Don Mueang Hotel	Phaholyothin 57 Rd.	(Bored Pile) Ø 0.80 Ø 1.00	42 42	48 34	17,200,000.00	Nuchinporn Co., Ltd.	13/05/19 - 24/06/19

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
4	Hallmark Charan 13	Charansanitwong Rd.	(Bored Pile) Ø 0.60	31	195	20,000,000.00	Chewathai Public Co., Ltd.	22/02/19 - 03/04/19
5	Chewathai Kaset Nawamin	Kaset Nawamin Rd.	(Bored Pile) Ø 1.00	50	157	42,500,000.00	Chewathai Public Co., Ltd.	26/03/19 - 13/05/19
6	Silom Square	Silom Rd.	(Bored Pile) Ø 1.00 Ø 1.20 Ø 1.50 (Pile Leg) Ø 0.80 (D-Wall Type 1) 0.80 thk. (D-Wall Type 2) 0.80 thk. (D-Wall Type 3) 0.80 thk.	63 63 63 63 21 21 21	32 46 173 43 197.63 m 85.08 m 85.17 m	193,200,000.00	NYE and RGP Development Co., Ltd.	07/02/20 - 21/06/20
7	MRT Pink Line (PK7) ช่วงแคราย - มีนบุรี (สถานีเลี้ยวเมืองปากเกร็ด)		(Barrette) 1.20x3.00	56	16	15,600,000.00	Sino-Thai Engineering & Construction PLC	24/02/20 - 25/03/20
8	MRT Pink Line (PK13) ช่วงแคราย - มีนบุรี (สถานีทีโอที)		(Barrette) 1.20x3.00	56	16	16,000,000.00	Sino-Thai Engineering & Construction PLC	09/08/19 - 11/09/19
9	MRT Pink Line (PK25) ช่วงแคราย - มีนบุรี (สถานีวงแหวนตะวันออก)		(Barrette) 1.20x3.00	57	16	16,000,000.00	Sino-Thai Engineering & Construction PLC	23/03/19 - 15/05/19

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
10	MRT Pink Line (PK24) ช่วงแคราย - มีนบุรี (สถานีสินแพทย์)	Rungpracha Rd.	(Barrette) 1.20x3.00	57	16	16,200,000.00	Sino-Thai Engineering & Construction PLC	31/05/19 - 28/06/19
	ช่วงแคราย - มีนบุรี (สายทาง P40, P41)		(Barrette) 1.20x3.00	46	4	37,000,000.00	Sino-Thai Engineering & Construction PLC	20/05/19 - 01/06/19
11	Lumpini Park Boromrajchonnane - Sirinthorn		(Bored Pile) (Bldg. A) Ø 0.80	50	23	19,800,000.00	L.P.N. Development Public Co., Ltd.	02/07/19 - 13/08/19
			Ø 1.00	50	21			
			(Bldg. B) Ø 0.80	50	27			
			Ø 1.00	50	17			
			(Bldg. C) Ø 0.80	50	28			
			Ø 1.00	50	16			
			(Car Park Bldg.) Ø 0.60	27	21			
			Ø 0.80	27	61			
12	อาคารศาลทหารและที่ทำการสำนักงานฯ ของ สป. (พื้นที่ศรีสมาน)	Srisamarn Rd.	(Bored Pile) Ø 0.60	39	50	31,900,000.00	Benjamas Co., Ltd.	02/05/19 - 20/07/19
			Ø 0.80	39	446			

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
13	Office of the National Broadcasting and Telecommunications (อาคารสำนักงาน กสทช. แห่งใหม่)	Rattana Thibet Rd.	(Bored Pile) (Bldg. A) Ø 0.80 Ø 1.00 Ø 1.20 (Bldg. H & E) Ø 0.80	45 45 45 45	110 61 94 189	34,500,000.00	Power Line Engineering Public Co., Ltd.	05/04/19 - 18/07/19
14	Eastery @ Bangna km. 5	Bangna-Trad km. 5 Rd.	(Bored Pile) Ø 0.80	35	115	15,500,000.00	N Holding Co., Ltd.	13/05/19 - 16/06/19
15	Berli Jucker Building C & D	Sukhumvit 42 Rd.	(Bored Pile) (Bldg. C) Ø 0.60 Ø 1.00 (Bldg. D) Ø 0.60 Ø 1.00	35 35 35 35	68 78 37 59	34,400,000.00	Berli Jucker Public Co., Ltd.	11/07/19 - 31/08/19
16	Rhythm Ekkamai Estate	Sukhumvit 63 Rd.	(Bored Pile) Ø 0.80 Ø 1.00	52 52	42 96	16,200,000.00	AP (Thailand) Public Co., Ltd.	20/10/19 - 22/1/20
17	Life Sathorn Sierra	Ratchadapisek 14 Rd.	(Bored Pile) Ø 0.80 Ø 1.00	52 52	83 299	38,200,000.00	AP (Thailand) Public Co., Ltd.	18/07/19 - 26/09/19

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
18	MB Sukhumvit 83	Sukhumvit 83 Rd.	(Bored Pile) Ø 0.60 Ø 0.80	35 35	137 59	23,000,000.00	MB Sukhumvit 83 Co., Ltd.	03/07/19 - 23/08/19
19	Conner Ratchathewi	Petchburi Rd.	(Bored Pile) Ø 0.8 Ø 1.00 Ø 1.20 (Pile Leg) Ø 0.80 (Barrette) 0.80x3.00 (D-Wall) 0.80 thk.	55 55 55 55 55 55 18	38 39 23 9 11 98.30 m.	60,000,000.00	C 09 Co., Ltd.	03/08/19- 24/11/19
20	The Address Siam - Ratchathewi	Petchburi Rd.	(Bored Pile) Ø 1.00 Ø 1.50	58 58	10 164	30,600,000.00	AP (Thailand) Public Co., Ltd.	07/03/20 - 05/06/20
21	GM Plaza Sukhumvit 43	Sukhumvit 43 Rd.	(Bored Pile) Ø 0.80 Ø 1.00 (Pile Wall) Ø 0.60 Ø 0.80	46 46 16.5 19	93 15 160 62	46,600,000.00	G.M. Plaza Co., Ltd.	05/09/19 - 29/01/20
22	The Cloud	Petchburi Rd.	(Bored Pile) Ø 0.35 Ø 1.00	21 58	52 163	45,000,000.00	Risland (Thailand) Co., Ltd.	11/01/20 - 20/03/20

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
23	Ken Attitude	Rattana Thibet 13 Rd.	(Bored Pile) Ø 0.60 Ø 0.80 Ø 1.00 Ø 1.20	20 50 50 50	164 2 4 89	42,400,000.00	Ten Thai Development Co., Ltd.	29/08/19 - 24/10/19
24	AIA East Gateway	Bangna-Trad km. 4	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20 Ø 1.50 Ø 1.00 Ø 1.20 Ø 1.50	55 55 55 55 65 65 65	45 84 35 8 10 13 196	180,000,000.00	AIA THAILAND	12/01/19 - 29/03/20
25	Chewathai Pinklao	Pinklao Rd.	(Bored Pile) Ø 0.80 Ø 1.00	49 49	108 42	33,000,000.00	Chewathai Public Co., Ltd.	16/10/20 - 22/11/20
26	Aspire Erawan A	Samutprakarn Province	(Bored Pile) Ø 0.80 Ø 1.00 Ø 1.20	54 54 54	36 94 96	26,000,000.00	AP (Thailand) Public Co., Ltd.	30/08/19 - 13/10/19
27	The Tree Victory Monument	Dindaeng Rd.	(Pile Wall) Ø 0.80 (Bored Pile) Ø 1.00	19 57	103 58	27,000,000.00	Prukha Real Estate Public Co., Ltd.	10/08/21 - 01/11/21

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
28	Somerset Pattaya	Chonburi Province	(Bored Pile) Ø 0.80 Ø 1.00	39 39	59 59	28,200,000.00	Ananda Development Public Co., Ltd.	08/11/19 - 23/01/20
29	Queen Sirikit National Convention Center	Ratchadapisek Rd.	(Bored Pile) Ø 1.00 Ø 1.20 Ø 1.50 (Pile Leg) Ø 1.00 (Pile Wall) Ø 1.20 Ø 1.20 (D-Wall) 1.00 thk. 1.00 thk.	64 64 64 64 28 30 28 30	263 285 387 78 248 117 648.50 m. 280.02 m.	637,700,000.00	Golden Land Property Development Public Co., Ltd.	03/10/19 - 26/02/20
30	The Forestias (Aspen Tree)	Samuthprakarn Province	(Bored Pile) Ø 1.00 Ø 0.50 Ø 0.80 Ø 0.80	21 21 56.2 56.2	65 138 390 369	177,100,000.00	Magnolia Quality Development Public Co., Ltd.	26/12/19 - 12/04/20
31	Canopy By Hilton Sukhumvit 12	Sukhumvit 12 Rd.	(Bored Pile) Ø 0.80 Ø 1.00 (D-Wall) 0.80 thk. (Barrette) 0.80x3.00	40 40 24 40	90 36 41 15	71,300,000.00	Lucky Living Properties Co., Ltd.	25/01/20 - 31/05/20

Projects Completed



PROJECTS COMPLETED 2019

ITEM	PROJECT NAME	LOCATION	PILE SIZE (M)	DEPTH (M)	TOTAL (NOS)	VALUE (APPROX.)	EMPLOYERS	START - FINISHED DATE
32	Rhythm Charoenkrung Pavillion	Charoenkrung 73 Rd.	(Bored Pile) (Bldg. A) Ø 1.00 Ø 1.20 (Bldg. B) Ø 0.60	54 54 30	12 129 48	19,780,000.00	AP (Thailand) Public Co., Ltd.	30/03/20 - 05/06/20

